


Keysight E3631A – E3634A Programmable DC Power Supplies


Reliable power, repeatable results

The Keysight Technologies, Inc. E3630A Series gives you get easy access to essential, everyday power sourcing capabilities that will advance your test today and tomorrow – reliably.

E3631A 80 W triple output power supply

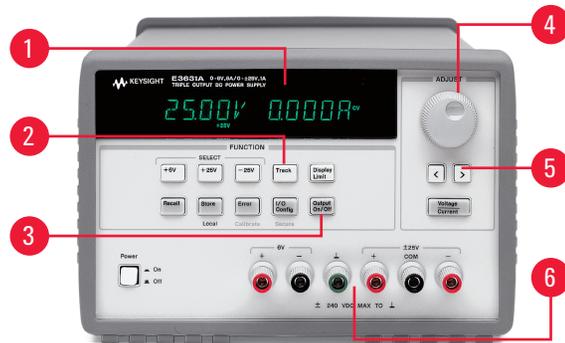

E3632A – E3634A 120 W to 200 W single output power supplies

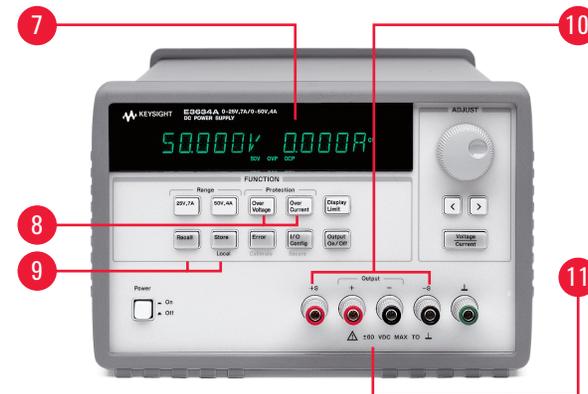

1. Two 4-digit voltage and current readings accurately display actual or limit values simultaneously
2. Autotracking for 25 V outputs synchronization provides required symmetrical voltages for easier and faster setup
3. Output ON/OFF key allows you to enable or disable power outputs, providing extra protection to the device-under-test
4. Easy-to-use settings knob allows quick and easy voltage or current settings
5. Resolution key provides fine setting on voltage or current resolutions for better accuracy
6. Three independent outputs
 - (0 to +6 V/5 A and 0 to \pm 25 V/1 A) minimize any interference between circuit-under-tests
 - Bias supply of \pm 25 V allows you to set appropriate operating points

7. Front-panel VFD (vacuum-fluorescent display) shows and monitors actual or limit values simultaneously
8. Delicate device-under-tests are provided with overvoltage and overcurrent protection
9. Three completed power supply setup states can be stored and recalled from internal non-volatile memory, reducing your setup time
10. Remote sensing function eliminates errors in voltage regulation due to voltage drop at load leads
11. Single output power supplies give you the flexibility to select from dual output ranges
 - E3632A (0 to 15 V/7 A or 0 to 30 V/4 A)
 - E3633A (0 to 8 V/20 A or 0 to 20 V/10 A)
 - E3634A (0 to 25 V/7 A or 0 to 50 V/4 A)

E3631A specifications

Model	E3631A		
DC outputs			
Voltage	0 to +25 V	0 to +25 V	0 to +6 V
Current	0 to 1 A	0 to 1 A	0 to 5 A
Ripple and noise from 20 Hz to 20 MHz			
Normal-mode voltage	< 350 μ Vrms/2 mVpp	< 350 μ Vrms/2 mVpp	< 350 μ Vrms/2 mVpp
Normal-mode current	< 500 μ Arms	< 500 μ Arms	< 500 μ Arms
Common-mode current	< 1.5 μ Arms	< 1.5 μ Arms	< 1.5 μ Arms
Programming accuracy at 25 °C \pm 5 °C			
Voltage	0.05% + 20 mV	0.05% + 20 mV	0.1% + 5 mV
Current	0.15% + 4 mA	0.15% + 4 mA	0.2% + 10 mA
Readback accuracy at 25 °C \pm 5 °C			
Voltage	0.05% + 20 mV	0.05% + 20 mV	0.1% + 5 mV
Current	0.15% + 4 mA	0.15% + 4 mA	
Resolution			
Program / readback	1.5 mV/0.1 mA	1.5 mV/0.1 mA	0.5 mV/0.5 mA
Meter	10 mV/1 mA	10 mV/1 mA	1 mV/1 mA

KEYSIGHT SERVICES

Accelerate Technology Adoption. Lower costs.

www.keysight.com/find/services

Keysight Services helps you improve productivity and product quality with our comprehensive service offerings of one-stop calibration, repair, asset management, technology refresh, consulting, training, and more.

E3632A, E3633A and E3634A specifications

Model	E3632A	E3633A	E3634A
DC outputs			
Voltage	0 to 15 V/0 to 30 V	0 to 8 V/0 to 20 V	0 to 25 V/0 to 50 V
Current	0 to 7 A/0 to 4 A	0 to 20 A/0 to 10 A	0 to 7 A/0 to 4 A
Ripple and noise from 20 Hz to 20 MHz			
Normal-mode voltage	< 350 μ Vrms/2 mVpp	< 350 μ Vrms/2 mVpp	< 500 μ Vrms/3 mVpp
Normal-mode current	< 2 mArms	< 2 mArms	< 2 mArms
Common-mode current	< 1.5 μ Arms	< 1.5 μ Arms	< 1.5 μ Arms
Programming accuracy at 25 °C \pm 5 °C			
Voltage	0.05% + 10 mV	0.05% + 10 mV	0.05% + 10 mV
Current	0.2% + 10 mA	0.2% + 10 mA	0.2% + 10 mA
Readback accuracy at 25 °C \pm 5 °C			
Voltage	0.05% + 5 mV	0.05% + 5 mV	0.05% + 5 mV
Current	0.15% + 5 mA	0.15% + 5 mA	0.15% + 5 mA
Resolution			
Program	1 mV/0.5 mA	1 mV/1 mA	3 mV/0.5 mA
Readback	0.5 mV/0.1mA	0.5 mV/1mA	1.5 mV/0.5 mA

Measurement Automation Quick and Easy

Whatever instrument you're programming – a power supply, power meter or data acquisition device, whether distributed or local – VEE graphical language software and GPIB, USB and instrument control products provide you the ease and flexibility to set up and automate the way you want for your application need. Make measurements quickly, easily, affordably – today.

www.keysight.com/find/IO
www.keysight.com/find/VEE